


# Serie Robot

## SR599 Circular Nylon Cable Chains

### Inner height (D) 59 mm

Construction with side bands male/female joining system with triple steel pin which guarantees higher resistance to torsion.

Movable separators ensure different possibilities for varying cable layout.

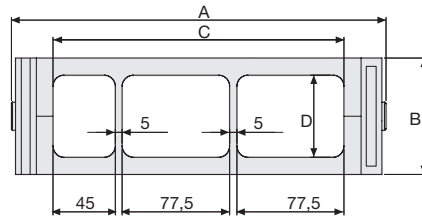


### Technical characteristics

Speed	180°/s
Acceleration	180°/s <sup>2</sup>

3

For higher requirements please consult our technical dept.

A	B	C	D	R	Weight/pitch	Chain
mm	mm	mm	mm	mm	kg	Part Number
272	85	210	59	220	0,900	SR599

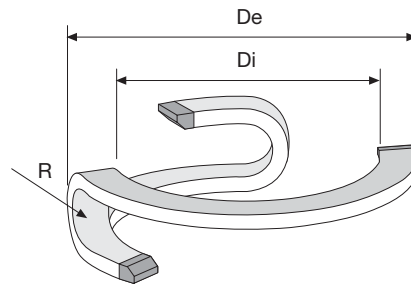

R	Di	De
mm	mm	mm
220	1400	2000

### Length of Chain

Chain	Degrees	No
Part Numbers	of Rotation	of Pitches
SR599	90	14
SR599	180	19
SR599	270	23
SR599	360	28



### Steel End Brackets

The end brackets set, containing two steel plates screwed to the links, allows the two ends of the chain to be attached to the equipment. The end brackets are installed in one position offering the possibility of attaching the chain externally. (Fig. A)

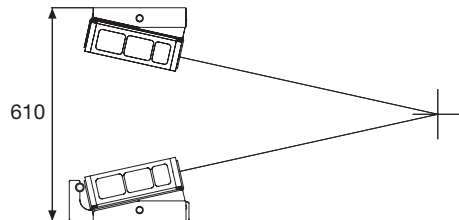


Fig. A

### Support Guide

For correct functioning of the chain it is necessary that the installation is done in a specific position.

For this reason Brevetti Stendalto has observed and created a support guide which can do this. (Fig. B)

For particular applications it is possible to create support guides with attachment plates and special dimensions.

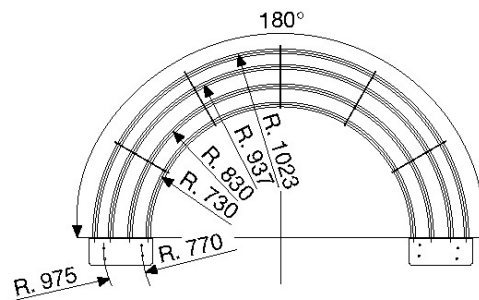


Fig. B

### Steel End Brackets Part Numbers

#### Complete Set Assembled

Chain Type	End Brackets Set
SR599	A599KM

#### Complete Set Unassembled

SR599	A599K
-------	-------

For applications with rotations exceeding 200° it is necessary to use the appropriate accessories for supporting the cable chain. (see page 28).

### Serie Robot

## SR599

### Circular Nylon Cable Chains